

# LOOX 2020 - 12V DOWNLIGHT

RECESS MOUNTED WITH SURFACE MOUNTED OPTION

SUITABLE FOR WET AREAS

**Dimmable**



12 V SYSTEM




The LED 2020 generates uniform, even distributed light and is ideal for atmospheric lighting in all areas. The light can be used in a variety of situations due to having two installation methods and three light colours.



**Note:**

Only IP 44 rated when recess mounted (provides protection against moisture).

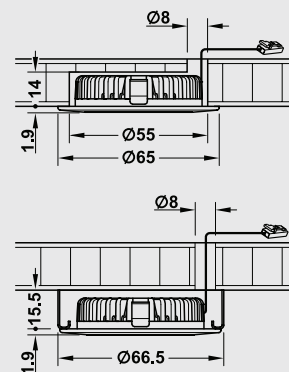

	Product Type	Light Colour (K)	Wattage (W)	Finish	Cat. No.	Cat. Page Ref.
	LOOX 2020 Downlight	3000	3.2	Nickel plated, matt	833.72.020	20 - 21
		4000	3.2	Nickel plated, matt	833.72.021	20 - 21
		5000	3.2	Nickel plated, matt	833.72.022	20 - 21
	Surface mount ring	-	-	Nickel plated, matt	833.72.800	20 - 21

Packing: 1 piece (light supplied with 2 mtr connecting lead)

**Note:**

Additional technical information can be found in the 2014 LOOX Lighting System catalogue on the pages referenced above.