


LOOX LED 2028

SENSOR-CONTROLLED PLINTH LIGHT, IP44




The LED 2028 is an orientation light with integrated daylight sensor and motion detector. If the residual brightness is 15 Lux or less, it becomes active and gives off light.

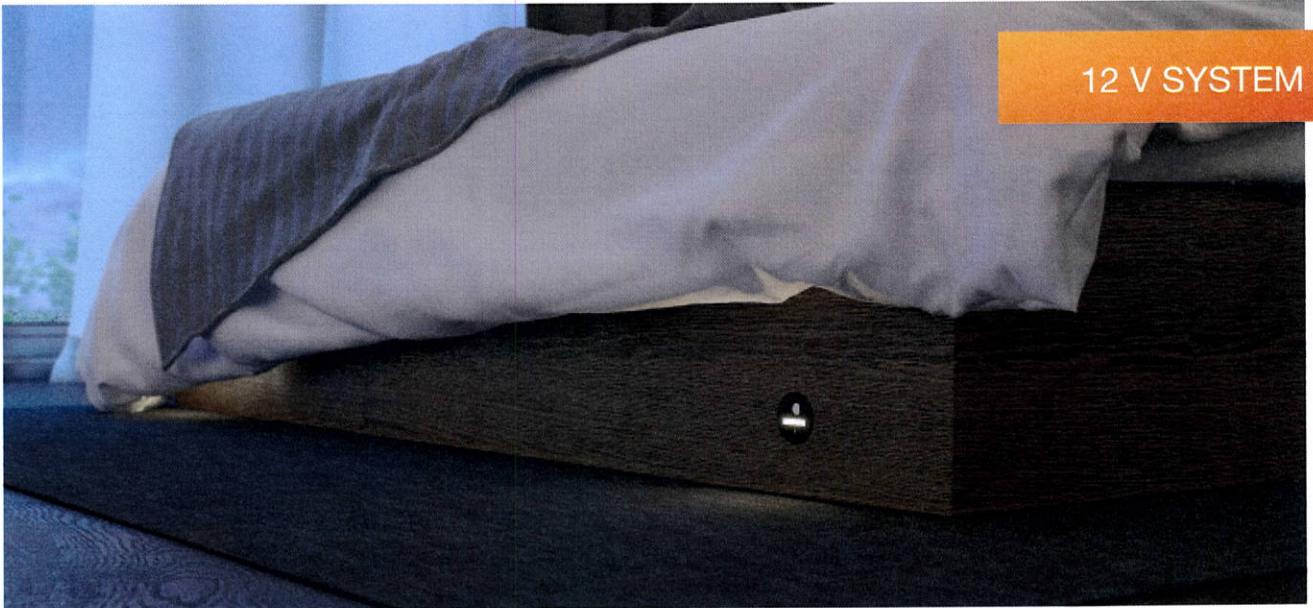

- > Cannot be dimmed
- > Drill hole Ø: 40 mm
- > Installation: For mounting in drilled hole
- > Delay time: approx. 4 min.



> Driver see page 64

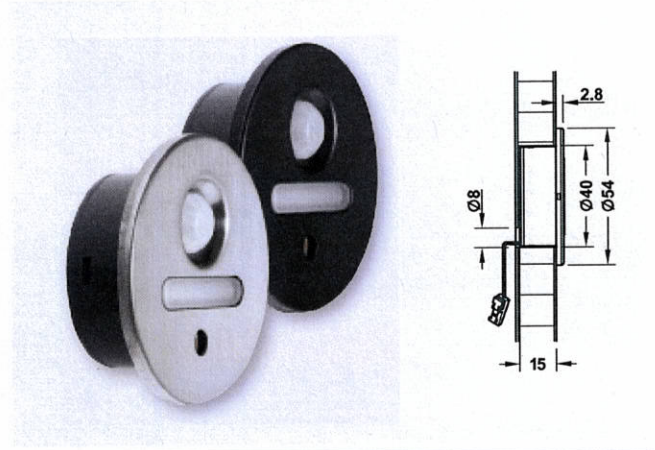

Cat. No.	833.73.110	833.73.111
Colour temperature (K)	2700 (warm white)	2700 (warm white)
Ø (mm)	54	54
Height (mm)	17.3	17.3
Wattage (W)	0.34	0.34
Number of LEDs	3	3
Light output (lm)	4	4
Efficacy (lm/W)	12	12
Colour rendering index (CRI)	90	90
Energy efficiency category	A+	A+
Weighted energy consumption (kWh/1.000 h)	0.37	0.37
Finish	Stainless steel	
Colour	Matt	Black
Supplied with	1 light with 2 m lead and fixing material	

